

PowerNox™ 6260

New Materials Creating New Performances

**Quality Products.
Dependable Service.**


CHEMICAL NAME

Bis(2,4-di-tert-butylphenyl) pentaerythritol diphosphite

Synonym:

3,9-bis(2,4-bis(1,1-dimethylethyl)phenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro(5.5)undecane

CHEMICAL STRUCTURE

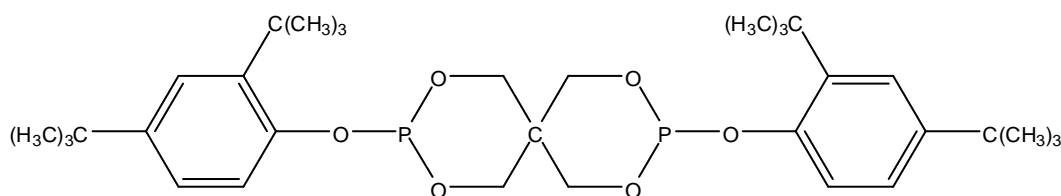

INTRODUCTION

PowerNox™ 6260 is a secondary high performance antioxidant for organic polymers. It has excellent melt flow and color protection during thermal processing of polymers.

PHYSICAL PROPERTIES

CAS No.	26741-53-7
EC No.	247-952-5
Formula	C ₃₃ H ₅₀ O ₆ P ₂
Molecular Weight	604
Melting point(°C)	160-175
Volatile loss(%)	Max.0.5
Appearance	White to Off-white Powder
Phosphorous Content(%)	10-10.3
Acid Value (mgKOH/g)	Max.1.0
2,4-DTBP Content (%)	Max.1.0
Min. Purity	99%

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright © TinToll Performance Materials Co., Ltd. www.TinToll.com.



PowerNox™ 6260

New Materials Creating New Performances

**Quality Products.
Dependable Service.**

Solubility (20°C)	% w/w
Acetone	8.5
Heptane	4.5
Mineral Oil	10
THF	35
n-Hexane	4.5
Methanol	1.9
Toluene	35.7
Water	<0.01

APPLICATIONS

PowerNox™ 6260 can be used as excellent melt flow and color protection during thermal processing of polymers.

PowerNox™ 6260 can be used in combination with hindered phenol.

PowerNox™ 6260 can be used with benzotriazoles and HALS for thermal and light stabilization in outdoor use.

HANDLING AND STORAGE

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

For more detailed information please refer to the material safety data sheet.

PACKING

PowerNox™ 6260 is supplied in 25Kg Aluminium Bag.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright © TinToll Performance Materials Co., Ltd. www.TinToll.com.

