

PowerSorb™ 2908


New Materials Creating New Performances

**Quality Products.
Dependable Service.**

Chemical Name

n-Hexadecyl-3,5-di-tert-butyl-4-hydroxybenzoate

Chemical Structure

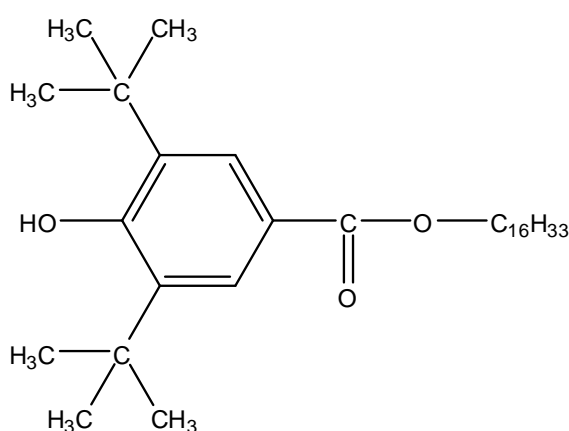

Introduction

PowerSorb™ 2908 is a benzoate-type light stabilizer that functions by scavenging free radicals formed during the photodegradation of plastic materials. Combined with hindered amine light stabilizers (HALS) often provide superior performance vs. HALS used alone, especially in polyolefin substrates.

PowerSorb™ 2908 is non-discoloring and resistant to extraction. It has good compatibility with polyolefin substrates. PowerSorb™ 2908 is FDA-cleared for use in many types of polyolefins for indirect food contact applications.

Physical Properties

CAS No.	67845-93-6
EC No.	267-342-2
Formula	C ₃₁ H ₅₄ O ₃

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Copyright©TinToll Performance Materials Co., Ltd. www.TinToll.com.



PowerSorb™ 2908

New Materials Creating New Performances

**Quality Products.
Dependable Service.**

Molecular Weight	475
Melting Point(°C)	55-65
Volatiles (%)	Max.0.5
Color of Solution 460nm (%)	Min.98
Color of Solution 500nm (%)	Min.99
Appearance	White Powder
Ash (%)	Max.0.1
Min. Purity	99%

Applications

PowerSorb™ 2908 is a benzoate-type light stabilizer recommended for use in combination with HALS and (optionally) UV absorbers in polyolefins. Potential applications include polypropylene and TPO thick-section parts and polyethylene (HDPE, LLDPE, LDPE) moldings, films, and tapes.

Handling and Storage

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Avoid continuous or repetitive breathing of dust. Use only with adequate ventilation. Protect skin. Avoid dust formation and ignition sources.

This product may be stored up to one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use.

For more detailed information please refer to the material safety data sheet.

Packing

PowerSorb™ 2908 is supplied in net weight 25kg fiber drum with PE liner.

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing. We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.
Copyright©TinToll Performance Materials Co., Ltd. www.TinToll.com.

