




SiSiB® VF6030-10000 FLUID

- 1 -

CHEMICAL NAME

Vinyl-terminated polydimethylsiloxane polymers

CHEMICAL STRUCTURE

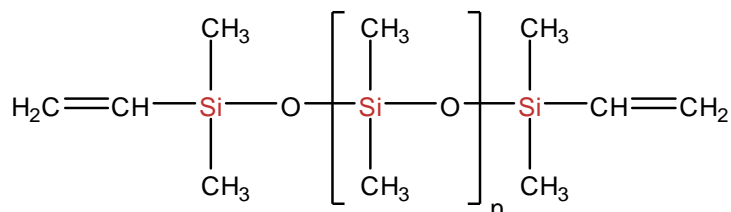

INTRODUCTION

SiSiB® vinyl-terminated dimethylpolysiloxanes are available in a variety of viscosities. Vinyl terminated silicone fluid is a base polymer for addition-curing RVT-2k (room temperature vulcanizing two component), LSR (liquid silicone rubber) silicone rubber. The terminal vinyl groups take part in the vulcanization reaction with Crosslinking agents in the presence of Catalysts.

TYPICAL PHYSICAL PROPERTIES

| | |
|----------------------------------|------------------------|
| Code | SiSiB® VF6030-10000 |
| CAS No. | 68083-19-2 |
| Color and Appearance | Colorless clear liquid |
| Active Ingredient | 100% |
| Specific Gravity _{25°C} | 0.97~0.98 |
| Refractive Index _{25°C} | 1.3950~1.4120 |
| Vinyl Content | 0.08~0.12% |
| Viscosity _{25°C} | 9500~10500 cSt |

APPLICATIONS

SiSiB® VF6030-10000 can be used as base polymers or as blend polymers in order to create the desired hardness. These polymers can be cured with silicon-hydride

Power Chemical
ISO9001 ISO14001 certified

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding our silicone products, you may visit www.SiSiB.com or www.PCC.asia.



SiSiB[®] VF6030-10000 FLUID

- 2 -

crosslinkers and a platinum catalyst.

PACKING AND STORAGE

SiSiB[®] VF6030-10000 is supplied in 190Kg steel drum or 950Kg IBC tote.

In the original unopened packaging, SiSiB[®] VF6030-10000 has a shelf life of one year in a dry and cool place.

NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: fluids@SiSiB.com.

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB[®] is a registered trademark of PCC. For more knowledge regarding our silicone products, you may visit www.SiSiB.com or www.PCC.asia.